

ELAN SHINE TOPCON Series

N-type
Bifacial Transparent Backsheet Modules

ASB-M10-144-AAA (AAA=550-575)
144 Cells | 550-575 Wp | Gen-II

575+ Wp

Maximum Power
Output


22.28%

Maximum Efficiency

0~+5W

Power Tolerance

Linear Performance Warranty

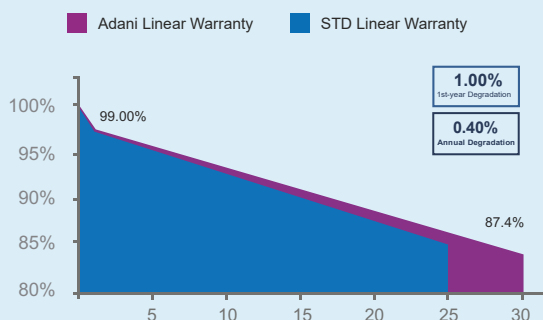

Highlights



Up to 30% Additional Power Gain when compared with conventional P-type module



No LID Loss - Higher power generation



Better Output In Low Irradiance- Higher power output even under low-light environments like on cloudy or foggy days



Better Temperature Coefficient- Higher power generation under higher ambient temperature conditions



Bifaciality Factor 80 ± 5 %

Delivers Reliable Performance Over Time

- Full-automatic facility and industry-leading technology
- Best-in-class durability and reliability

